


X3






主要特点

- 支持HDR
- 全插卡式输入输出设计
- 支持热插拔技术，快速任意更换
- 支持HDMI 2.0的4K@60信号输入
- 支持DP 1.2的4K@60信号输入
- 支持12G/6G/3G/HD/SD SDI输入
- 4K/2K EDID管理
- H.264流媒体输入
- 多种工作模式
- 支持3D信号
- GENLOCK外同步
- 支持XPOSE软件与T系列控台控制
- 电源模块拔插技术和电源1+1冗余功能

应用图

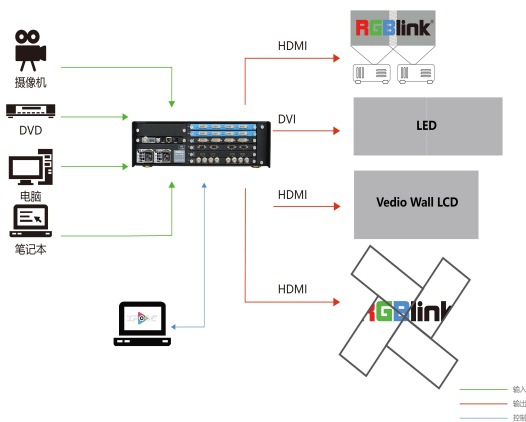

尺寸

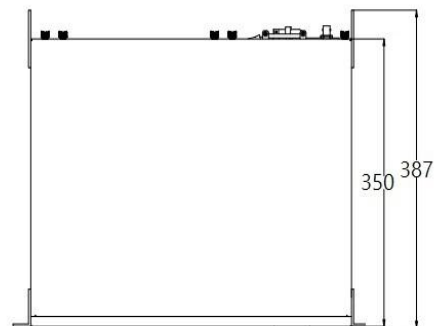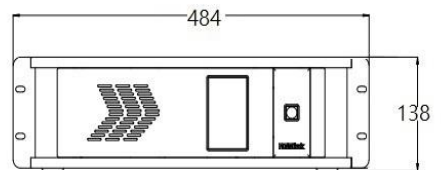

订货编码

产品代码	项目
310-0003-10-0	X3
190-0003-01-0	4路DVI输入模块
190-0003-02-0	4路2K HDMI输入模块
190-0003-03-0	4路VGA输入模块
190-0003-04-0	4路3G-SDI (SCALE) 输入模块
190-0003-06-0	8路CVBS输入模块
190-0003-07-0	4路USB2.0输入模块
190-0003-11-0	4K@30输入模块
190-0003-13-0	4路H.264输入模块
190-0003-15-0	4K@60Hz 输入模块
190-0003-17-0	12G SDI 输入模块
190-0003-18-0	4路HDBaseT输入模块

产品代码	项目
190-0003-21-0	4路DVI输出模块
190-0003-22-0	4路2K HDMI输出模块
190-0003-24-0	4路3G-SDI输出模块
190-0003-25-0	4路HDBaseT 输出模块
190-0003-28-0	ARO 旋转模块
190-0003-38-0	2路4K HDMI输出模块
950-0001-00-0	热插拔电源200W

电话: +86-592-5771197 传真: +86-592-5788216 E-mail: sales@rgblink.com

公司总部: 厦门市湖里区留学人员创业园伟业楼 S601-608

所有规格如有变更, 恕不另行通知!

视诚 **RGBlink**

www.rgblink.com



规格

接口	输入	4 插槽, 支持16路输入 选配 4K@60 模块 4K@30模块 12 SDI模块 3G SDI模块 2K HDMI模块 DVI模块 H.264模块 HDBaseT模块 VGA模块 CVBS模块 USB模块	1 x DVI-I 2 x HDMI-A 1 x DisplayPort 2 x DVI-I 2x HDMI-A (1 In/1 Loop) 2x DisplayPort (1 In/1Loop) 4 x BNC (1路12G SDI, 或者4路3G SDI) 8 x BNC (4 In 4 Loop) 4 x HDMI-A 4 x DVI-I 4 x RJ 45 4 x RJ 45 4 x DB15 8 x BNC 4 x USB-A
	输出	2插槽, 支持8路输出 选配 2K HDMI模块 DVI模块 HDBaseT模块 4K HDMI模块 DVI旋转模块	4 x HDMI-A 4 x DVI-I 4 x RJ 45 2 x HDMI-A 4 x DVI-I
	通讯	LAN RS 232 USB Genlock/同步	1 x RJ 45 1 x RJ 11 1 x USB-B 1x BNC 1 x HDMI-A
	电源	2 插槽 最多可装2个电源	IEC
性能	输入分辨率	3G SDI SMPTE DVI HDMI SMPTE VESA HDBaseT SMPTE VESA CVBS SMPTE VGA VESA H.264 4K@30 SMPTE VESA 4K@60 SMPTE VESA 12G SDI SMPTE	480i 576i 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30 800x600@60 1024x768@60 1280x768@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x960@60 720p@50/60 1080p@24/25/30/50/60 800x600@60/75/85 1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60 1400x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2048x816@60 480i 576i 800x600@60 1024x768@60 1280x960@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x480 544x480 608x448 640 x 360 640x480 704x576 720x404 720x480 720x540 1280x720 720x576 850x480 1024x576 1680x1056 1920x1080 480p 576p 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30 800x600@60 1024x768@60 1280x800@60 1280x1024@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x1600@60 3840 x 2160@30 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@50/59.94/60 2160p@30/60 800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1080@60 2048x1152@60 2560x960@60 2560x1600@60 3840x1080@60 3840x2160@30 3840x2160@60
	输出分辨率	选择标准分辨率或者自定义分辨率 SDI SMPTE DVI HDMI SMPTE VESA HDBaseT SMPTE 4K HDMI SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 800x600@60 1024x768@60 1280x800@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1152@60 720p@50/59.94/60 1080i@50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60 1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1400x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 1920x1080@60 2560x812@60 2048x816@60 720p@25/30/50/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/60 800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 2560x1600@60 3840x1080@60 3840x2160@60 4096x2160@60
	支持标准	SDI HDMI DP DVI HDBaseT	SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI, MADI 2.0 1.2 Dual Link 1.0
	灰度等级	12 bit	
	色空间	4:4:4	
电源	输入电源	AC 100~264V 50/60Hz	
	最大功率	205W	
工作环境	温度	0°C~55°C	
	湿度	10%~90%	
物理参数	重量	设备重量 12.3kg 包装重量 20.4kg	
	尺寸	设备尺寸 485mmx387mmx135mm 包装尺寸 635mmx545mmx275mm	

